2022 PRODUCT CATALOGUE



Teknik SAT® Cabinet

CABINET SYSTEMS



ABOUT US

Specialized metal was founded in 2016. Our company, which works without compromising the principles of quality production and customer satisfaction, manufactures new products with the production of TEKNOLINE branded Rack Cabinets and Cabinet Accessories with modern machine parks. Our production, design and applications are made by 100% domestic technology. We provide a high quality service, the standards required to ensure installation.

19 tir Rack Cabinets and Accessories, Indoor and Outdoor Panel, Lighting Fixtures, Stands and special productions have a wide product range. Learn more.

They produce software in their production with designs produced with new technologies.

Experienced and dynamic team with the Refinery and Rack Transmission, Communication and Information Technology are presented to markets in Turkey and abroad with.

Click here to follow the technology and trust articles to give better service.

You can use our cabinet products safely at all prices. Leader in the Cabinet Sector with Appropriate Payment Terms Fast Delivery. We are trying to make a difference between us and our competitors with the principle of unchanging quality.

We produce all our products together with the latest technology and machines. Today, we continue to produce new products and competencies.

Technical offers Metal, production and design services to meet the expectations of customers is to provide.

- TSE
- CE
- ISO 9001: 2008
- ISO 14001: 2004
- OHSAS 18001: 2007
- Warranty Certificate
- Has ROSH Certificate.

Customer satisfaction papers;

- Superior quality
- High stock
- Reasonable price
- Timely delivery
- Multirenk selection
- Boutique designs
- Long life products

OUR CORPORATE VALUES;

- Justice
- Being savvy
- Being a researcher
- Wisdom
- Not waiting for someone to change
- Sensitivity
- Search for differences and take power from differences
- To respond to evolving needs
- Development
- Trusting
- Being reliable
- Become a developer

- Provide communication
- Improvement
- Participation
- Quantification and consideration.
- Review, continuous
- Being selfless
- Being a guide
- Systematic work
- Problem solving fast
- Consistency
- Based on data and information

VISION MISSION

Our Vision

To be the manufacturer & provider of technology products and services suitable for the needs of customers of all business partners in the world and in our country in the weak current technologies lane and to continue its activities as the leading weak current technologies company in the market. In this journey, we aim to make a world brand with decisive steps in the aim of making a world brand, while on this journey, we will provide personalized service with exploration, offer, production, assembly and after-sales services on topics of Weak Current Technologies as well as volume and value-added business model.

Our Mission

To be the main procurement center of our product range, to work with our manufacturer identity, to increase our competitiveness and to meet all of our business partners' weak current technologies products and service needs by providing them the best logistics service. In order to ensure the satisfaction of our business partners, we provide a working environment where our employees can feel trust and satisfaction and to measure and continuously improve our work efficiency.

Our Values

Trustworthy and Reputation

In all our behaviors, we always take care to have high business ethics, to be consistent, to be honest, to perform what we say, to be respectful to others, to have our company in every sense and to represent it in the best way.

Result Focused

As a fast, dynamic and hard-working team, we love to succeed. We focus on our target, and we strive to be a leader in the sector with our cost leadership. We achieve our results by exhibiting sustainable and measurable efficiency.

We are a competent team

We are open to continuous development and importance. We value learning and learning as a team. We feel responsible for our work and results, and we improve our competencies to get results. We take care to realize all these with the positive and optimistic communication skills, making life easier.

We strive for innovation

We take care to be creative, changeable and open to opportunities. We take measurable risks to generate new ideas and to assess existing opportunities.



RACKCABINET

FREE STANDING DATA CENTER CABINET

It is designed to enable all active and passive devices to be protected thanks to its aesthetic appearance, high quality design and manufacturing which will be used in server applications.



Design, all brands and models are manufactured with active and passive ventilation and traceability in every detail accessories that you can install active and passive devices.

The digital temperature sensor measures the temperature of the heat and Fan 1 and 2 enter the circuit at the specified temperature intervals.

At extremely high temperatures the Buzzer Alarm is switched on and the warning buzzer sounds.

- STRK 26U

- STRK 36U

STRK 42U

- STRK 48U

• STRK 52U

- Temperature Sensor
- Digital Indicator
- Dual System Cooling Fan With 2 And 4
- Temperature Analysis
- Remote Access










19"RACK**CABINET**Data Center

Free Standing Rack Cabinet

Network/Server cabinets,

Quality and value added in the most optimal way.

Parallel to the high performance and quality of its network applications, fully automatic industrial infrastructure and design create an unbelievable price index and offer the customer likes.

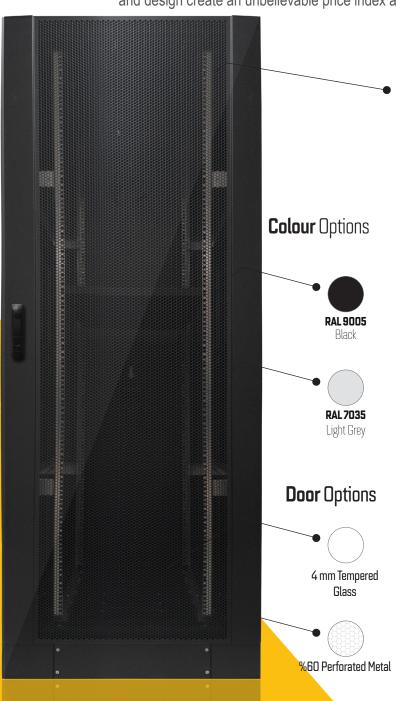

In the 600mm 800 mm

wide 800mm, 1000mm, 1100mm, 1200mm depth range,

From 26U to 52U, 6 different heights are offered. The cabinets are supplied as standard with %60 perforated metal door, 3 point interlock, locked metal side panels and a locked metal rear door. All panels and doors are lockable.

Wide product height portfolio, Everything you need for your infrastructure meets the need for height.

In addition to its technical appearance, it also has an aesthetic appearance

Completely standard and stocked product portfolio is shipped preassembled and disassembled flat pack options

It is offered with the quality to meet all usage demands and various accessory options and most suitable for usage area.









19"RACK**CABINET**Data Center

Free Standing Rack Cabinet

DETAILS

19 "Free standing Data Center Rack Cabinet – All steel construction - Ergonomic design - Carrying frame is steel construction with 1.5mm thickness - Openable and lockable side and back covers - Adjustable rack mounting brackets at the desired level - 151500 kg carrying capacity - Easy assembling - An optional fan unit can be installed in the ceiling - Lower and upper cable entries for heavy cabiling needs

— Standart colors RAL 9005, 7035














19"RACK**CABINET**Server Type Free Standing Rack Cabinet

TECNICHAL DETAILS

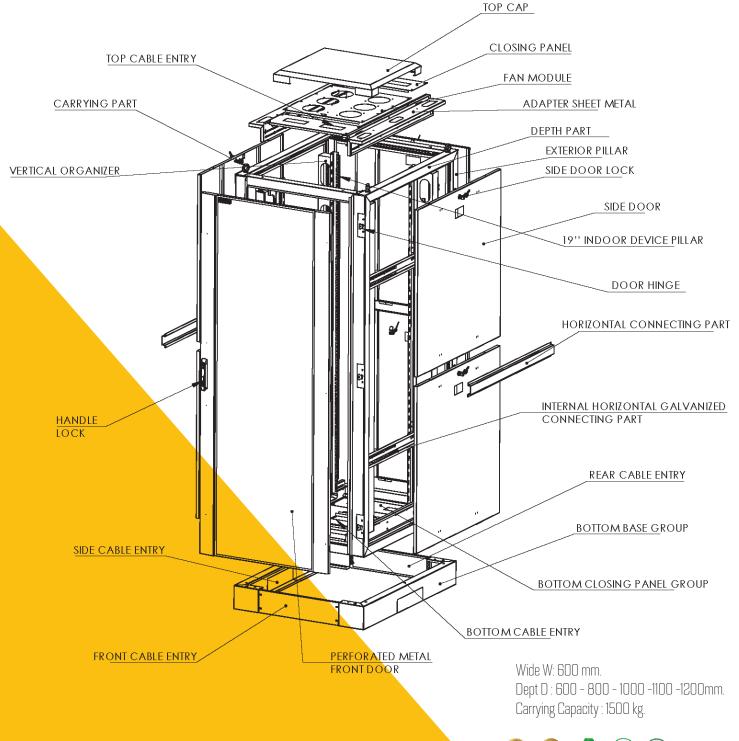









19"RACK**CABINET**

TECNICHAL DETAILS

600x800 Data Center Cabinet

Product Code	Description	Stack Code	Dimension wxdxh Mm	h Dimension U	H mm Outside Outside TWheel and Footless Measure Wheels 90 mm	Amount In Packing	Packing Dimension WxDxH mm	Disassembled Box Dimensions mm	Net Product Weight G.	Gros Product Weight G.
STRK-26U6080	26U 19" Server Type Cabinet W: 600mm D: 800 mm	57001	600x800x1478	26U	1478	1	630x830x1508	830x430x1508	48.000	56.000
STRK-32U6080	32U 19" Server Type Cabinet W: 600mm D: 800 mm	57002	600x800x1745	32U	1745	1	630x830x1775	830x430x1775	59.000	67.000
STRK-36U6080	36U 19" Server Type Cabinet W: 600mm D: 800 mm	57003	600x800x1923	36U	1923	1	630x830x1953	830x430x1953	66.000	74.000
STRK-42U6080	42U 19" Server Type Cabinet W: 600mm D: 800 mm	57004	600x800x2190	42U	2190	1	630x830x2220	830x430x2220	77.000	85.000
STRK-48U6080	48U 19" Server Type Cabinet W: 600mm D: 800 mm	57005	600x800x2457	48U	2457	1	630x830x2487	830x430x2487	88.000	96.000
STRK-52U6080	52U 19" Server Type Cabinet W: 600mm D: 800 mm	57006	600x800x2635	52U	2635	1	630x830x2665	830x430x2665	96.000	104.000

600x1000 Data Center Cabinet

STRK-26U60100	26U 19" Server Type Cabinet W: 600mm D: 1000 mm	57011	600x1000x1478	26U	1478	1	630x1030x1508	1030x430x1508	58.000	64.000
STRK-32U60100	32U 19" Server Type Cabinet W: 600mm D: 1000 mm	57012	600x1000x1745	32U	1745	1	630x1030x1775	1030x430x1775	71.000	78.000
STRK-36U60100	36U 19" Server Type Cabinet W: 600mm D: 1000 mm	57013	600x1000x1923	36U	1923	1	630x1030x1953	1030x430x1953	80.000	88.000
STRK-42U60100	42U 19" Server Type Cabınet W: 600mm D: 1000 mm	57014	600x1000x2190	42U	2190	1	630x1030x2220	1030x430x2220	93.000	101.000
STRK-48U60100	48U 19" Server Type Cabinet W: 600mm D: 1000 mm	57015	600x1000x2457	48U	2457	1	630x1030x2487	1030x430x2487	106.000	114.000
STRK-52U60100	52U 19" Server Type Cabınet W: 600mm D: 1000 mm	57016	600x1000x2635	52U	2635	1	630x1030x2665	1030x430x2665	115.000	123.000

600x1100 Data Center Cabinet

STRK-26U60110	26U 19" Server Type Cabinet W: 600mm D: 1100 mm	57021	600x1100x1478	26U	1478	1	630x1130x1508	1130x430x1508	64.000	72.000
STRK-32U60110	32U 19" Server Type Cabinet W: 600mm D: 1100 mm	57022	600x1100x1745	32U	1745	1	630x1130x1775	1130x430x1775	79.000	87.000
STRK-36U60110	36U 19" Server Type Cabinet W: 600mm D: 1100 mm	57023	600x1100x1923	36U	1923	1	630x1130x1953	1130x430x1953	89.000	96.000
STRK-42U60110	42U 19" Server Type Cabinet W: 600mm D: 1100 mm	57024	600x1100x2190	42U	2190	1	630x1130x2220	1130x430x2220	103.000	111.000
STRK-48U60110	48U 19" Server Type Cabinet W: 600mm D: 1100 mm	57025	600x1100x2457	48U	2457	1	630x1130x2487	1130x430x2487	117.000	125.000
STRK-52U60110	52U 19" Server Type Cabınet W: 600mm D: 1100 mm	57026	600x1100x2635	52U	2635	1	630x1130x2665	1130x430x2665	127.000	135.000

600x1200 Data Center Cabinet

STRK-26U60120	26U 19" Server Type Cabinet W: 600mm D: 1200 mm	57031	600x1200x1478	26U	1478	1	630x1230x1508	1230x430x1508	71.000	79.000
STRK-32U60120	32U 19" Server Type Cabinet W: 600mm D: 1200 mm	57032	600x1200x1745	32U	1745	1	630x1230x1775	1230x430x1775	87.000	95.000
STRK-36U60120	36U 19" Server Type Cabinet W: 600mm D: 1200 mm	57033	600x1200x1923	36U	1923	1	630x1230x1953	1230x430x1953	97.000	105.000
STRK-42U60120	42U 19" Server Type Cabinet W: 600mm D: 1200 mm	57034	600x1200x2190	42U	2190	1	630x1230x2220	1230x430x2220	114.000	122.000
STRK-48U60120	48U 19" Server Type Cabinet W: 600mm D: 1200 mm	57035	600x1200x2457	48U	2457	1	630x1230x2487	1230x430x2487	129.000	137.000
STRK-52U60120	52U 19" Server Type Cabinet W: 600mm D: 1200 mm	57036	600x1200x2635	52U	2635	1	630x1230x2665	1230x430x2665	140.000	148.000

19"RACK**CABINET**

TECNICHAL DETAILS

800x800 Data Center Cabinet

Product Code	Description	Stack Code	Dimension wxdxh Mm	h Dimension U	H mm Outside Outside TWheel and Footless Measure Wheels 90 mm	Amount In Packing	Packing Dimension WxDxH mm	Disassembled Box Dimensions mm	Net Product Weight G.	Gras Product Weight G.
STRK-26U8080	26U 19" Server Type Cabinet W: 800mm D: 800 mm	57051	800x800x1478	26U	1478	1	830x830x1508	830x430x1508	60.000	68.000
STRK-32U8080	32U 19" Server Type Cabınet W: 800mm D: 800 mm	57052	800x800x1745	32U	1745	1	830x830x1775	830x430x1775	73.000	81.000
STRK-36U8080	36U 19" Server Type Cabinet W: 800mm D: 800 mm	57053	800x800x1923	36U	1923	1	830x830x1953	830x430x1953	83.000	91.000
STRK-42U8080	42U 19" Server Type Cabınet W: 800mm D: 800 mm	57054	800x800x2190	42U	2190	1	830x830x2220	830x430x2220	96.000	104.000
STRK-48U8080	48U 19" Server Type Cabinet W: 800mm D: 800 mm	57055	800x800x2457	48U	2457	1	830x830x2487	830x430x2487	110.000	118.000
STRK-52U8080	52U 19" Server Type Cabinet W: 800mm D: 800 mm	57056	800x800x2635	52U	2635	1	830x830x2665	830x430x2665	119.000	127.000

800x1000 Data Center Cabinet

STRK-26U80100	26U 19" Server Type Cabinet W: 800mm D: 1000 mm	57061	800x1000x1478	26U	1478	1	830x1030x1508	1030x430x1508	75.000	83.000
STRK-32U80100	32U 19" Server Type Cabınet W: 800mm D: 1000 mm	57062	800x1000x1745	32U	1745	1	830x1030x1775	1030x430x1775	92.000	100.000
STRK-36U80100	36U 19" Server Type Cabinet W: 800mm D: 1000 mm	57063	800x1000x1923	36U	1923	1	830x1030x1953	1030x430x1953	103.000	111.000
STRK-42U80100	42U 19" Server Type Cabınet W: 800mm D: 1000 mm	57064	800x1000x2190	42U	2190	1	830x1030x2220	1030x430x2220	120.000	128.000
STRK-48U80100	48U 19" Server Type Cabinet W: 800mm D: 1000 mm	57065	800x1000x2457	48U	2457	1	830x1030x2487	1030x430x2487	137.000	145.000
STRK-52U80100	52U 19" Server Type Cabinet W: 800mm D: 1000 mm	57066	800x1000x2635	52U	2635	1	830x1030x2665	1030x430x2665	149.000	157.000

800x1100 Data Center Cabinet

STRK-26U80110	26U 19" Server Type Cabinet W: 800mm D: 1100 mm	57071	800x1100x1478	26U	1478	1	830x1130x1508	1130x430x1508	82.000	90.000
STRK-32U80110	32U 19" Server Type Cabınet W: 800mm D: 1100 mm	57072	800x1100x1745	32U	1745	1	830x1130x1775	1130x430x1775	101.000	109.000
STRK-36U80110	36U 19" Server Type Cabinet W: 800mm D: 1100 mm	57073	800x1100x1923	36U	1923	1	830x1130x1953	1130x430x1953	114.000	122.000
STRK-42U80110	42U 19" Server Type Cabınet W: 800mm D: 1100 mm	57074	800x1100x2190	42U	2190	1	830x1130x2220	1130x430x2220	132.000	140.000
STRK-48U80110	48U 19" Server Type Cabinet W: 800mm D: 1100 mm	57075	800x1100x2457	48U	2457	1	830x1130x2487	1130x430x2487	151.000	159.000
STRK-52U80110	52U 19" Server Type Cabınet W: 800mm D: 1100 mm	57076	800x1100x2635	52U	2635	1	830x1130x2665	1130x430x2665	164.000	172.000

800x1200 Data Center Cabinet

STRK-26U80120	26U 19" Server Type Cabinet W: 800mm D: 1200 mm	57081	800x1200x1478	26U	1478	1	830x1230x1508	1230x430x1508	90.000	98.000	Ī
STRK-32U80120	32U 19" Server Type Cabınet W: 800mm D: 1200 mm	57082	800x1200x1745	32U	1745	1	830x1230x1775	1230x430x1775	111.000	119.000	
STRK-36U80120	36U 19" Server Type Cabinet W: 800mm D: 1200 mm	57083	800x1200x1923	36U	1923	1	830x1230x1953	1230x430x1953	125.000	133.000	
STRK-42U80120	42U 19" Server Type Cabınet W: 800mm D: 1200 mm	57084	800x1200x2190	42U	2190	1	830x1230x2220	1230x430x2220	146.000	154.000	
STRK-48U80120	48U 19" Server Type Cabinet W: 800mm D: 1200 mm	57085	800x1200x2457	48U	2457	1	830x1230x2487	1230x430x2487	166.000	174.000	
STRK-52U80120	52U 19" Server Type Cabinet W: 800mm D: 1200 mm	57086	800x1200x2635	52U	2635	1	830x1230x2665	1230x430x2665	180.000	188.000	

RACKCABINET

INTELLIGENT COOLING SYSTEM (AGILE)

It is designed to enable all active and passive devices to be protected thanks to its aesthetic appearance, high quality design and manufacturing which will be used in office applications.



PRACTICAL AND ERGONOMIC

design, all brands and models are manufactured with active and passive ventilation and traceability in every detail accessories that you can install active and passive devices.

The digital temperature sensor measures the temperature of the heat and Fan 1 and 2 enter the circuit at the specified temperature intervals.

At extremely high temperatures the Buzzer Alarm is switched on and the warning buzzer sounds.

- Temperature Sensor
- Digital Indicator
- Dual System Cooling Fan With 2 And 4
- Temperature Analysis
- Remote Access









Free Standing Rack Cabinet

Network/Server cabinets,

Quality and value added in the most optimal way.

Parallel to the high performance and quality of its network applications, fully automatic industrial infrastructure and design create an unbelievable price index and offer the customer likes.



In the 600mm wide range,

From 16U to 44U, 8 different depths are offered. The cabinets are supplied as standard with glass front door, mechanical interlock, locked metal side panels and a locked metal rear door. All panels and doors are lockable.

Wide product height portfolio,

Everything you need for your infrastructure meets the need for height.

In addition to its technical appearance, it also has an aesthetic appearance with decorative extrusion aluminum front door frame.

Completely standard and stocked product portfolio is shipped pre-assembled and disassembled.

The height adjustment foot is not included in the dispatch configuration.

It is offered with the quality to meet all usage demands and various accessory options and most suitable for height usage area.













19"RACK**CABINET 60 Series**

Free Standing Rack Cabinet

DETAILS

19 "Stylish type modular rack cabinet – All steel construction - Ergonomic design - Carrying frame is steel construction with 1.5mm thickness - Openable and lockable side and back covers - Adjustable rack mounting brackets at the desired level - 800 kg carrying capacity - Easy assembling - An optional fan unit can be installed in the ceiling - he front door is supported by 4 mm tempered glass and sheet frame - Lower and upper cable entries – Standart colors ral 9005, 7035 and 7032 - Dismounted at freight costs: 50% savings, convenient price
















19"RACK**CABINET 60 Series**

Free Standing Rack Cabinet

TECNICHAL DETAILS

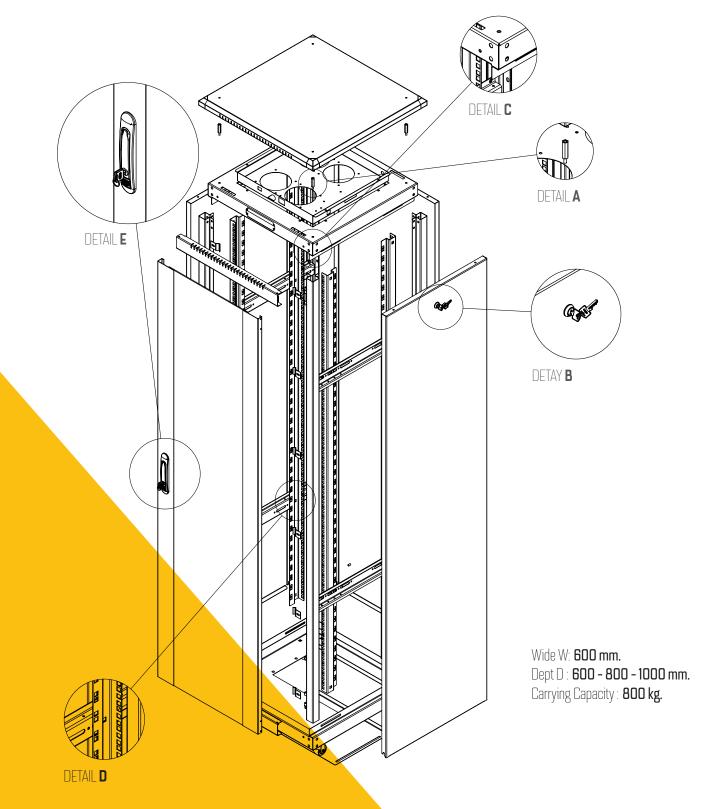









19"RACK**CABINET**

TECNICHAL DETAILS

600x600 Free Standing Rack Cabinet

Product Code	Description	Stack Cade	Dimension wxdxh Mm	h Dimension U	hmm	H mm Outside Outside TWheel and Footless Measure Wheels 90 mm	Wide mm	Wide Device	Between The Bins Depth Mm	Amount In Packing	Packing Dimension WxDxH mm	Net Product Weight G.	Gros Product Weight G.
TSRK-16U6060	16U 19" Free Standing Cabinet W: 600mm D: 600 mm	17001	600x600x885	16U	740	885	600	19"	600	1	620x620x905	32.000	32.000
TSRK-20U6060	20U 19" Free Standing Cabinet W: 600mm D: 600 mm	17002	600x600x1066	200	915	1066	600	19"	600	1	620x620x1086	40.000	40.000
TSRK-22U6060	22U 19" Free Standing Cabinet W: 600mm D: 600 mm	17003	600x600x1155	22U	1004	1155	600	19"	600	1	620x620x1175	44.000	44.000
TSRK-26U6060	26U 19" Free Standing Cabinet W: 600mm D: 600 mm	17004	600x600x1333	26U	1182	1333	600	19"	600	1	620x620x1353	52.000	52.000
TSRK-32U6060	32U 19" Free Standing Cabinet W: 600mm D: 600 mm	17005	600x600x1600	32U	1450	1600	600	19"	600	1	620x620x1620	64.000	64.000
TSRK-36U6060	36U 19" Free Standing Cabinet W: 600mm D: 600 mm	17006	600x600x1780	36U	1625	1780	600	19"	600	1	620x620x1800	72.000	72.000
TSRK-42U6060	42U 19" Free Standing Cabinet W: 600mm D: 600 mm	17007	600x600x2045	42U	1895	2045	600	19"	600	1	620x620x2065	84.000	84.000
TSRK-44U6060	44U 19" Free Standing Cabinet W: 600mm D: 600 mm	17008	600x600x2130	44U	1985	2130	600	19"	600	1	620x620x2150	88.000	88.000

600x800 Free Standing Rack Cabinet

Product Code	Description	Stock Code	Dimension wxdxh Mm	h Dimension U	h mm	H mm Outside Outside TWheel and Footless Measure Wheels 90 mm	Widemm	Wide Device	Between The Bins Depth Mm	Amount In Packing	Packing Dimension WxDxH mm	Net Product Weight G.	Gros Product Weight G.
TSRK-16U6080	16U 19" Free Standing Cabınet W: 600mm D: 800 mm	17011	600x800x885	16U	740	885	600	19"	800	1	620x820x905	40.000	40.000
TSRK-20U6080	20U 19" Free Standing Cabinet W: 600mm D: 800 mm	17012	600x800x1066	20U	915	1066	600	19"	800	1	620x820x1086	50.000	50.000
TSRK-22U6080	22U 19" Free Standing Cabinet W: 600mm D: 800 mm	17013	600x800x1155	22U	1004	1155	600	19"	800	1	620x820x1175	55.000	55.000
TSRK-26U6080	26U 19" Free Standing Cabinet W: 600mm D: 800 mm	17014	600x800x1333	26U	1182	1333	600	19"	800	1	620x820x1353	65.000	65.000
TSRK-32U6080	32U 19" Free Standing Cabinet W: 600mm D: 800 mm	17015	600x800x1600	32U	1450	1600	600	19"	800	1	620x820x1620	80.000	80.000
TSRK-36U6080	36U 19" Free Standing Cabinet W: 600mm D: 800 mm	17016	600x800x1780	36U	1625	1780	600	19"	800	1	620x820x1800	90.000	90.000
TSRK-42U6080	42U 19" Free Standing Cabinet W: 600mm D: 800 mm	17017	600x800x2045	42U	1895	2045	600	19"	800	1	620x820x2065	105.000	105.000
TSRK-44U6080	44U 19" Free Standing Cabinet W: 600mm D: 800 mm	17018	600x800x2130	44U	1985	2130	600	19"	800	1	620x820x2150	110.000	110.000

600x1000 Free Standing Rack Cabinet

Product Code	Description	Stock Code	Dimension wxdxh Mm	h Dimension U	hmm	H mm Outside Outside TWheel and Footless Measure Wheels 90 mm	Wide mm	Wide Device	Between The Bins Depth Mm	Amount In Packing	Packing Dimension WxDxH mm	Net Product Weight G.	Gros Product Weight G.
TSRK-16U60100	16U 19" Free Standing Cabınet W: 600mm D: 1000 mm	17021	600x1000x885	16U	740	885	600	19"	1000	1	620x1020x905	48.000	48.000
TSRK-20U60100	20U 19" Free Standing Cabinet W: 600mm D: 1000 mm	17022	600x1000x1066	20U	915	1066	600	19"	1000	1	620x1020x1086	60.000	60.000
TSRK-22U60100	22U 19" Free Standing Cabinet W: 600mm D: 1000 mm	17023	600x1000x1155	22U	1004	1155	600	19"	1000	1	620x1020x1175	66.000	66.000
TSRK-26U60100	26U 19" Free Standing Cabinet W: 600mm D: 1000 mm	17024	600x1000x1333	26U	1182	1333	600	19"	1000	1	620x1020x1353	78.000	78.000
TSRK-32U60100	32U 19" Free Standing Cabinet W: 600mm D: 1000 mm	17025	600x1000x1600	32U	1450	1600	600	19"	1000	1	620x1020x1620	96.000	96.000
TSRK-36U60100	36U 19" Free Standing Cabinet W: 600mm D: 1000 mm	17026	600x1000x1780	36U	1625	1780	600	19"	1000	1	620x1020x1800	108.000	108.000
TSRK-42U60100	42U 19" Free Standing Cabinet W: 600mm D: 1000 mm	17027	600x1000x2045	42U	1895	2045	600	19"	1000	1	620x1020x2065	126.000	126.000
TSRK-44U60100	44U 19" Free Standing Cabinet W: 600mm D: 1000 mm	17028	600x1000x2130	44U	1985	2130	600	19"	1000	1	620x1020x2150	132.000	132.000

Free Standing Rack Cabinet

Network/Server cabinets.

Quality and value added in the most optimal way.

Parallel to the high performance and quality of its network applications, fully automatic industrial infrastructure and design create an unbelievable price index and offer the customer likes.





Free Standing Rack Cabinet

DETAILS

19 "Stylish type modular rack cabinet – All steel construction - Ergonomic design - Carrying frame is steel construction with 1.5mm thickness - Openable and lockable side and back covers - Adjustable rack mounting brackets at the desired level - 800 kg carrying capacity - Easy assembling - An optional fan unit can be installed in the ceiling - he front door is supported by 4 mm tempered glass and sheet frame - Lower and upper cable entries – Standart colors ral 9005, 7035 and 7032 - Dismounted at freight costs: 50% savings, convenient price
















Free Standing Rack Cabınet

TECNICHAL DETAILS

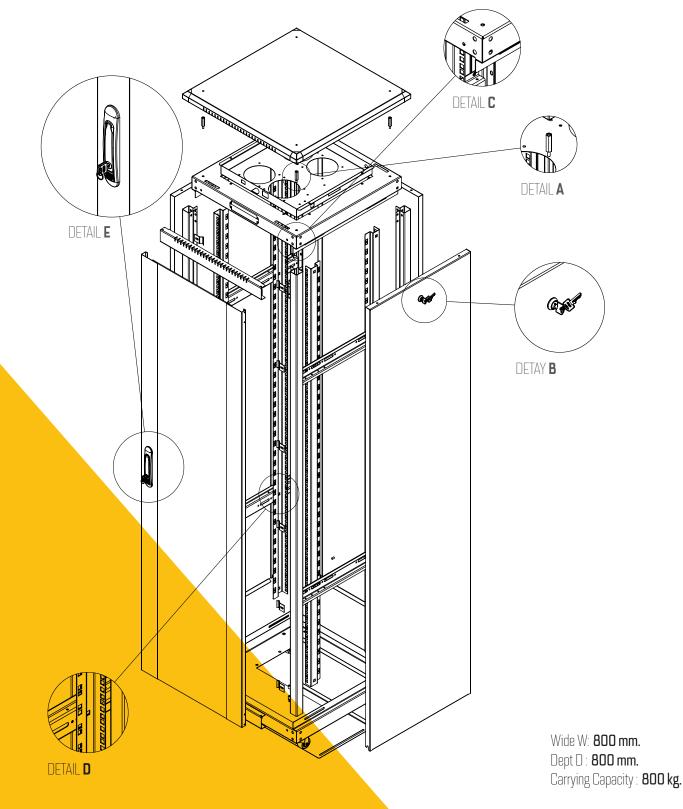







Free Standing Rack Cabınet

TECNICHAL DETAILS

800x800 Free Standing Rack Cabinet

Product Code	Description	Stock Code	Dimension wxdxh Mm	h Dimension U	hmm	Hmm Outside Outside TWheel and Footless Measure Wheels 90 mm	Widemm	Wide Device	Between The Bins Depth Mm	Amount In Packing	Packing Dimension WxDxH mm	Net Product Weight G.	Gros Product Weight G.
TSRK-16U8080	16U 19" Free Standing Cabınet W: 800mm D: 800 mm	17031	800x800x885	16U	740	885	800	19"	800	1	820x820x905	49.600	49.600
TSRK-20U8080	20U 19" Free Standing Cabinet W: 800mm D: 800 mm	17032	800x800x1066	20U	915	1066	800	19"	800	1	820x820x1086	62.000	62.000
TSRK-22U8080	22U 19" Free Standing Cabınet W: 800mm D: 800 mm	17033	800x800x1155	22U	1004	1155	800	19"	800	1	820x820x1175	68.200	68.200
TSRK-26U8080	26U 19" Free Standing Cabınet W: 800mm D: 800 mm	17034	800x800x1333	26U	1182	1333	800	19"	800	1	820x820x1353	80.600	80.600
TSRK-32U8080	32U 19" Free Standing Cabinet W: 800mm D: 800 mm	17035	800x800x1600	32U	1450	1600	800	19"	800	1	820x820x1620	99.200	99.200
TSRK-36U8080	36U 19" Free Standing Cabinet W: 800mm D: 800 mm	17036	800x800x1780	36U	1625	1780	800	19"	800	1	820x820x1800	111.600	111.600
TSRK-42U8080	42U 19" Free Standing Cabınet W: 800mm D: 800 mm	17037	800x800x2045	42U	1895	2045	800	19"	800	1	820x820x2065	130.200	130.200
TSRK-44U8080	44U 19" Free Standing Cabinet W: 800mm D: 800 mm	17038	800x800x2130	44U	1985	2130	800	19"	800	1	820x820x2150	136.400	136.400

800x1000 Free Standing Rack Cabinet

Product Code	Description	Stock Code	Dimension wxdxh Mm	h Dimension U	hmm	H mm Outside Outside TWheel and Footless Measure Wheels 90 mm	Widemm	Wide Device	Between The Bins Depth Mm	Amount In Packing	Раскіпд	Net Product Weight G.	Gros Product Weight G.
TSRK-16U80100	16U 19" Free Standing Cabinet W: 800mm D: 1000 mm	17041	800x1000x885	16U	740	885	800	19"	1000	1	820x1020x905	52.800	52.800
TSRK-20U80100	20U 19" Free Standing Cabınet W: 800mm D: 1000 mm	17042	800x1000x1066	20U	915	1066	800	19"	1000	1	820x1020x1086	66.000	66.000
TSRK-22U80100	22U 19" Free Standing Cabinet W: 800mm D: 1000 mm	17043	800x1000x1155	22U	1004	1155	800	19"	1000	1	820x1020x1175	72.600	72.600
TSRK-26U80100	26U 19" Free Standing Cabınet W: 800mm D: 1000 mm	17044	800x1000x1333	26U	1182	1333	800	19"	1000	1	820x1020x1353	85.800	85.800
TSRK-32U80100	32U 19" Free Standing Cabinet W: 800mm D: 1000 mm	17045	800x1000x1600	32U	1450	1600	800	19"	1000	1	820x1020x1620	105.600	105.600
TSRK-36U80100	36U 19" Free Standing CabınetW: 800mm D: 1000 mm	17046	800x1000x1780	36U	1625	1780	800	19"	1000	1	820x1020x1800	118.800	118.800
TSRK-42U80100	42U 19" Free Standing Cabınet W: 800mm D: 1000 mm	17047	800x1000x2045	42U	1895	2045	800	19"	1000	1	820x1020x2065	138.600	138.600
TSRK-44U80100	44U 19" Free Standing Cabınet W: 800mm D: 1000 mm	17048	800x1000x2130	44U	1985	2130	800	19"	1000	1	820x1020x2150	145.200	145.200



RACKCABINET

FREE STANDING EASY SERIES CABINET

It is designed to enable all active and passive devices to be protected thanks to its aesthetic appearance, high quality design and manufacturing which will be used in server applications.



PRACTICAL AND ERGONOMIC

Design, all brands and models are manufactured with active and passive ventilation and traceability in every detail accessories that you can install active and passive devices.

The digital temperature sensor measures the temperature of the heat and Fan 1 and 2 enter the circuit at the specified temperature intervals.

At extremely high temperatures the Buzzer Alarm is switched on and the warning buzzer sounds.

• ERK 16U

• ERK 20U

• ERK 22U

• ERK 26U

• ERK 32U

• ERK 36U

• ERK 42U

- Temperature Sensor
- Digital Indicator
- Dual System Cooling Fan With 2 And 4
- Temperature Analysis
- Remote Access










19"RACK**CABINET EASY Series**

Free Standing Rack Cabinet

EASY Series Network cabinets.

Quality and value added in the most optimal way.

Parallel to the high performance and quality of its network applications, fully automatic industrial infrastructure and design create an unbelievable price index and offer the customer likes.

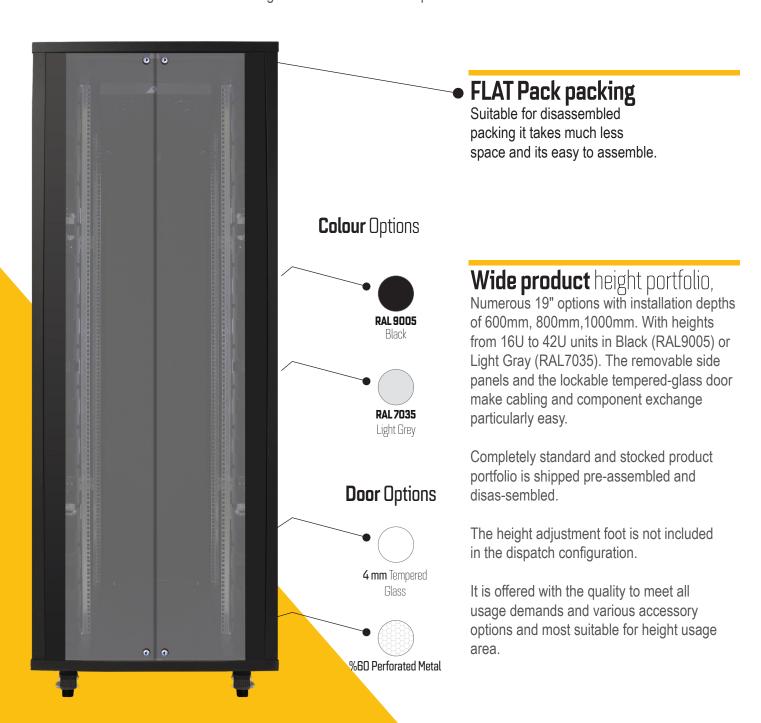











19"RACK**CABINET EASY Series**

Free Standing Rack Cabinet

DETAILS

19 "Stylish type modular rack cabinet – All steel construction - Ergonomic design - Carrying frame is steel construction with 1.5mm thickness - Openable and lockable side and back covers - Adjustable rack mounting brackets at the desired level - 800 kg carrying capacity - Easy assembling - An optional fan unit can be installed in the ceiling - he front door is supported by 4 mm tempered glass and sheet frame - Lower and upper cable entries – Standart colors ral 9005, 7035 and 7032 - Dismounted at freight costs: 50% savings, convenient price














19"RACK**CABINET EASY Series**

Free Standing Rack Cabinet

TECNICHAL DETAILS

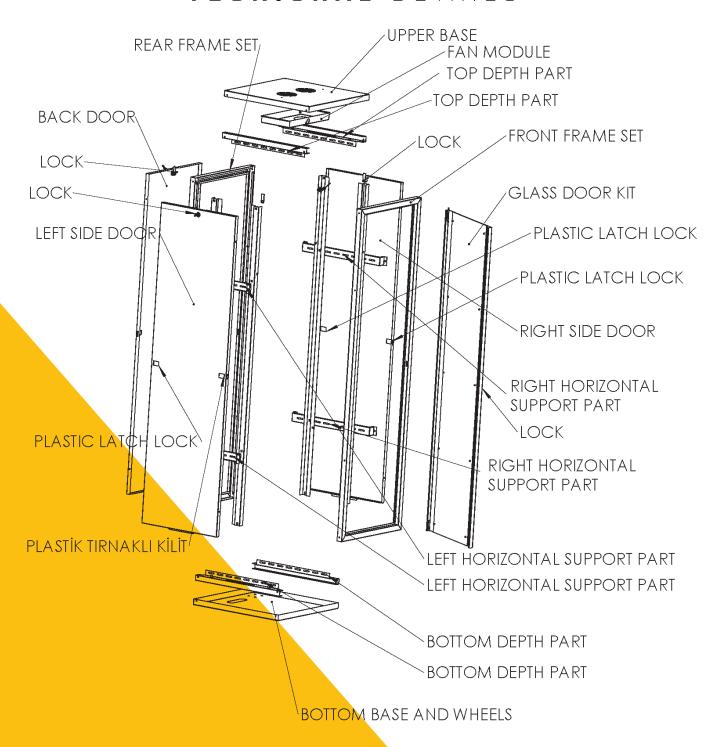

Wide W: **600 mm.**Dept D: **600 - 800 - 1000 mm.**Carrying Capacity: **600 kg.**











TECNICHAL DETAILS

600x800 Easy Type Cabinet

Product Code	Description	Stack Code	Dimension wxdxh Mm	h Dimension U	H mm Outside Outside TWheel and Footless Measure Wheels 90 mm	Amount In Packing	Раскіпд Оітепзіоп WxDxH mm	Disassembled Box Dimensions mm	Net Product Weight G.	Gros Product Weight G.
ERK-16U6080	16U 19" Easy Type Cabinet W: 600mm D: 800 mm	30060	600x800x938	16U	938	1	630x830x968	690x858x250	25.000	33.000
ERK-20U6080	20U 19" Easy Type Cabinet W: 600mm D: 800 mm	30061	600x800x1116	200	1116	1	630x830x1146	690x1036x250	31.000	39.000
ERK-26U6080	26U 19" Easy Type Cabinet W: 600mm D: 800 mm	30062	600x800x1383	26U	1383	1	630x830x1413	690x1303x250	40.000	48.000
ERK-32U6080	32U 19" Easy Type Cabinet W: 600mm D: 800 mm	30063	600x800x1680	32U	1680	1	630x830x1680	690x1570x250	48.000	56.000
ERK-36U6080	36U 19" Easy Type Cabinet W: 600mm D: 800 mm	30064	600x800x1858	36U	1858	1	630x830x1858	690x1748x250	55.000	63.000
ERK-42U6080	42U 19" Easy Type Cabinet W: 600mm D: 800 mm	30065	600x800x2125	42U	2125	1	630x830x2125	690x2015x250	63.000	71.000

600x1000 Easy Type Cabinet

ERK-16U60100	16U 19" Easy Type Cabinet W: 600mm D: 1000 mm	30080	600x1000x938	16U	938	1	630x1030x968	690x858x250	30.000	38.000
ERK-20U60100	20U 19" Easy Type Cabinet W: 600mm D: 1000 mm	30081	600x1000x1116	20U	1116	1	630x1030x1146	690x1036x250	38.000	46.000
ERK-26U60100	26U 19" Easy Type Cabinet W: 600mm D: 1000 mm	30082	600x1000x1383	26U	1383	1	630x1030x1413	690x1303x250	49.000	57.000
ERK-32U60100	32U 19" Easy Type Cabinet W: 600mm D: 1000 mm	30083	600x1000x1680	32U	1680	1	630x1030x1680	690x1570x250	60.000	68.000
ERK-36U60100	36U 19" Easy Type Cabinet W: 600mm D: 1000 mm	30084	600x1000x1858	36U	1858	1	630x1030x1858	690x1748x250	68.000	76.000
ERK-42U60100	42U 19" Easy Type Cabinet W: 600mm D: 1000 mm	30085	600x1000x2125	42U	2125	1	630x1030x2125	690x2015x250	78.000	86.000

800x800 Easy Type Cabinet

ERK-16U8080	16U 19" Easy Type Cabinet W: 800mm D: 800 mm	30100	800x800x938	16U	938	1	830x830x968	890x858x250	30.000	38.000	
ERK-20U8080	20U 19" Easy Type Cabinet W: 800mm D: 800 mm	30101	800x800x1116	20U	1116	1	830x830x1146	890x1036x250	38.000	46.000	
ERK-26U8080	26U 19" Easy Type Cabinet W: 800mm D: 800 mm	30102	800x800x1383	26U	1383	1	830x830x1413	890x1303x250	49.000	57.000	
ERK-32U8080	32U 19" Easy Type Cabinet W: 800mm D: 800 mm	30103	80 0x800x1680	32U	1680	1	830x830x1680	890x1570x250	60.000	68.000	
ERK-36U8080	36U 19" Easy Type Cabinet W: 800mm D: 800 mm	30104	800x800x1858	36U	1858	1	830x830x1858	890x1748x250	68.000	76.000	
ERK-42U8080	42U 19" Easy Type Cabinet W: 800mm D: 800 mm	30105	800x800x2125	42U	2125	1	830x830x2125	890x2015x250	78.000	86.000	

800x1000 Eko Type Cabinet

ERK-16U80100	16U 19" Easy Type Cabinet W: 800mm D: 1000 mm	30120	600x1000x938	16U	938	1	630x1030x968	890x858x250	38.000	46.000	
ERK-20U80100	20U 19" Easy Type Cabinet W: 800mm D: 1000 mm	30121	600x1000x1116	20U	1116	1	630x1030x1146	890x1036x250	47.000	55.000	
ERK-26U80100	26U 19" Easy Type Cabinet W: 800mm D: 1000 mm	30122	600x1000x1383	26U	1383	1	630x1030x1413	890x1303x250	61.000	69.000	
ERK-32U80100	32U 19" Easy Type Cabinet W: 800mm D: 1000 mm	30123	600x1000x1680	32U	1680	1	630x1030x1680	890x1570x250	74.000	82.000	
ERK-36U80100	36U 19" Easy Type Cabinet W: 800mm D: 1000 mm	30124	600x1000x1858	36U	1858	1	630x1030x1858	890x1748x250	84.000	92.000	
ERK-42U80100	42U 19" Easy Type Cabinet W: 800mm D: 1000 mm	30125	600x1000x2125	42U	2125	1	630x1030x2125	890x2015x250	97.000	105.000	

RACKCABINET

CO-LOCATION RACK CABINET

It is designed to enable all active and passive devices to be protected thanks to its aesthetic appearance, high quality design and manufacturing which will be used in server applications.




- SRK 42U

- SRK 44U

SRK 48U

- SRK 52U

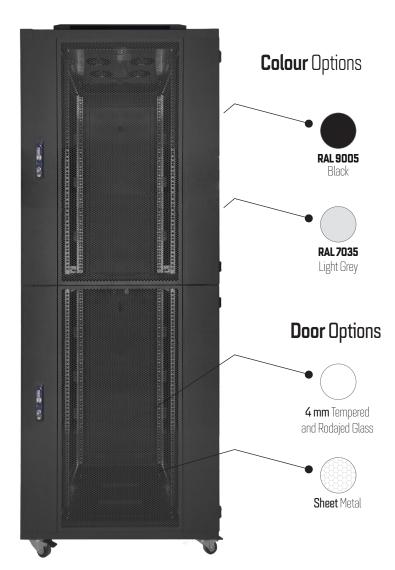

PRACTICAL AND ERGONOMIC

42U Co-location cabinet is a high-quality, fully specified colocation cabinet consisting of 2, 3 or 4 independent compartments. Compartment sizes vary depending on the height of the rack.










19"RACK**CABINET 60 Series**

CO-LOCATION Rack Cabinet

TECNICHAL DETAILS

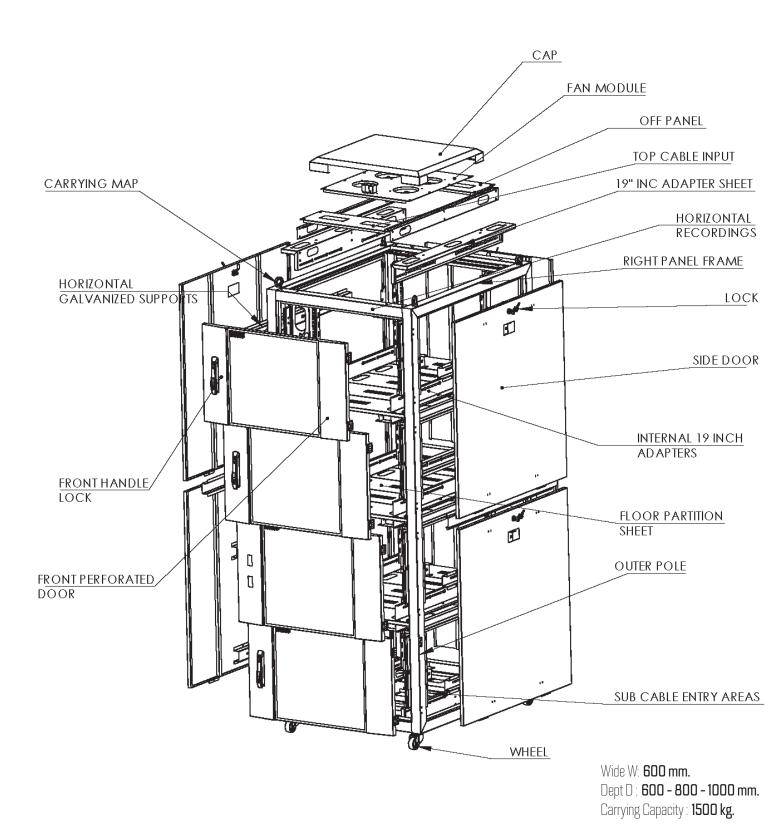

19"RACK**CABINET 60 Series**

Free Standing Rack Cabinet

DETAILS

19 "Stylish type modular rack cabinet – All steel construction - Ergonomic design - Carrying frame is steel construction with 2mm thickness - Openable and lockable side and back covers - Adjustable rack mounting brackets at the desired level - 1500 kg carrying capacity - Easy assembling - An optional fan unit can be installed in the ceiling - he front door is supported by 4 mm tempered glass and sheet frame - Lower and upper cable entries for every compartment– In the Width (800mm) & Depth (1000mm) range.- From 42U to 45U rack cabinets are offered.


-Adjustable feet and heavy duty castors.

-1500KG Static Load.

-Standard colors RAL 9005 and RAL 7035.





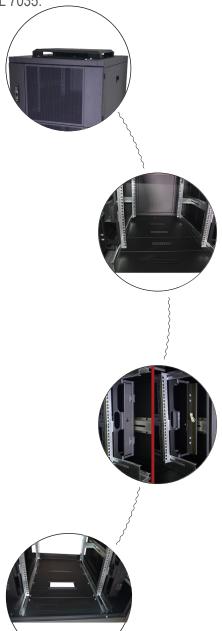











RACKCABINET

WALL TYPE

Network/Server cabinets,

Quality and value added in the most optimal way.

Parallel to the high performance and quality of its network applications, fully automatic industrial infrastructure and design create an unbelievable price index and offer the customer likes.



7U = 9U = 12U = 12

SOHO

ECO

PRO

ECO:

In 520X400 sizes, 4 different heights are offered up to 4,7,9,12U.

PRO:

600X450 and 600x600 sizes 2 kind 3 different heights are offered up to 7,9,12U.

ECO: Cabinets are standard mechanical lock with glass front cover.

Pro: In the cabins, side covers can be opened and locked.











Network/Server cabinets,

Quality and value added in the most optimal way.

Parallel to the high performance and quality of its network applications, fully automatic industrial infrastructure and design create an unbelievable price index and offer the customer likes.

Rack Cabin series

Wall-type eco cabins

19 "w: 520 mm and d: 450 mm at physical dimensions is the maximum internal use depth at physical measurements offers a wide selection of users with 4 different heights

All

Wall-mounted

cabinets are shipped as standard and stocked pre-assembled in one piece and standard factory settings.

Colour Options





As decorative

are presented with special design parts and accessories for harmonization to your surroundings and living spaces.







DETAILS

Full length, smoked, high resistance to breaking, tempered, antistatic 4,0 mm thick glazed and locked structure.

The front door is made of tempered glass. 9035 gray, 9005 textured black, there are 2 colors.














TECNICHAL DETAILS

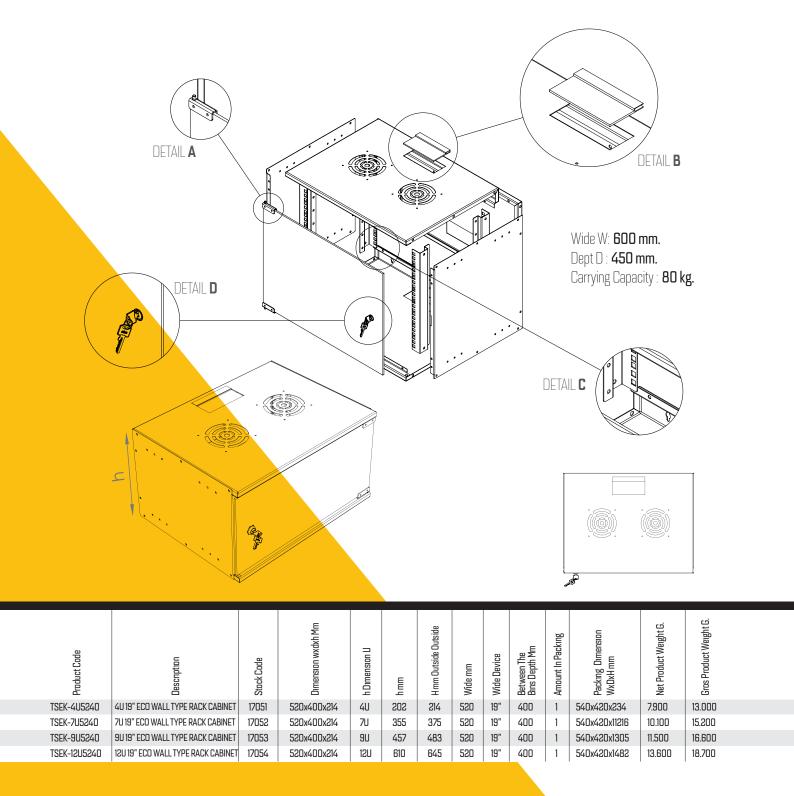







Network/Server cabinets,

Quality and value added in the most optimal way.

Parallel to the high performance and quality of its network applications, fully automatic industrial infrastructure and design create an unbelievable price index and offer the customer likes.



Rack Kabin series

Wall-type eco cabins, 19 "w: 600 mm and d: 450 mm in physical measurements, maximum internal It has a depth of usage and offers a wide selection of users with 3 different height. Ferfore door option.

All Wall-mounted cabinets

are shipped as standard and stocked pre-assembled in one piece and standard factory settings.

Colour Options



Black



Light Grey

As decorative

are presented with special design parts and accessories for harmonization to your surroundings and living spaces.









19"RACK**CABINET**600x450 Wall Type Rack Cabinet

DETAILS

Full length, smoked, high resistance to breaking, tempered, antistatic 4,0 mm thick glazed and locked structure.










TECNICHAL DETAILS

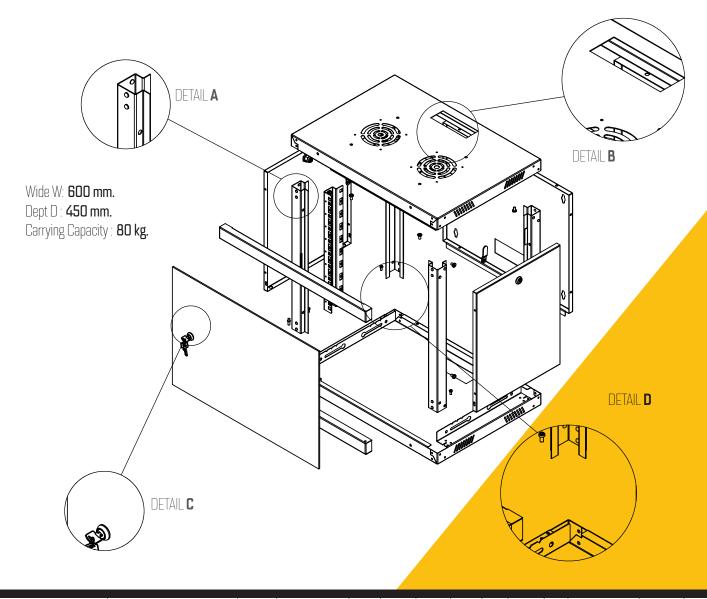

	Product Code	Description	Stock Code	Dimension wxdxh Mm	h Dimension U	h mm	H mm Outside Outside	Wide mm	Wide Device	Between The Bins Depth Mm	Amount In Packing	Packing Dimension WxDxH mm	Net Product Weight G.	Gros Product Weight G.
20	TSPK-7U6045	7U 19" PRO WALL TYPE RACK CABINET	17061	600x450x396	7U	330	396	600	19"	450	1	620x470x416	11.100	16.200
600x450	TSEK-9U6045	9U 19" PRO WALL TYPE RACK CABINET	17062	600x450x510	9U	425	510	600	19"	450	1	620x470x530	12.500	17.600
8	TSEK-12U6045	12U 19" PRO WALL TYPE RACK CABINET	17063	600x450x680	12U	566	680	600	19"	450	1	620x470x700	14.600	19.700
00	TSPK-7U6060	7U 19" PRO WALL TYPE RACK CABINET	17064	600x600x396	7U	330	396	600	19"	600	1	620x620x416	11.100	16.200
600x600	TSEK-9U6060	9U 19" PRO WALL TYPE RACK CABINET	17065	600x600x510	9U	425	510	600	19"	600	1	620x620x530	12.500	17.600
60	TSEK-12U6060	12U 19" PRO WALL TYPE RACK CABINET	17066	600x600x680	12U	566	680	600	19"	600	1	620x620x700	14.600	19.700







RACK**CABINET**

WALL TYPE

Double Section cabinets,

Quality and value added in the most optimal way.

Parallel to the high performance and quality of its network applications, fully automatic industrial infrastructure and design create an unbelievable price index and offer the customer likes.

Double Section **Rack Cabinet** Wall-type Double section cabins 19 "w: 600 mm and d: 650 mm at physical dimensions is the maxi-12 U mum internal use depth at physical measurements offers a wide selection of users with 4 different heights 16 U · Openable and lockable side and hack covers · Easy mounted on wall. · 100KG Static Load. • The front door is supported by 4 mm tempered glass and sheet frame. · Standard colors RAL 9005 and RAI 7035. · Heights: , 12U, 16U, 20U.26U As decorative are presented with special design parts and accessories for harmonization to your surroundings and living spaces. **Colour** Options RAL 7035 **RAL 9005** Light Grey

























	Product Code	Description	Stack Cade	Dimension wxdxh M	h Dimension U	hmm	H mm Outside Outsid	Widemm	Wide Device	Between The Bins Depth Mm	Amount In Packing	Packing Dimension WxDxH mm	Net Product Weight
C	TSPK-DS -7U6045	7U 19" Wall Mount Single Section Cabinet	57061	600x450x396	7U	330	396	600	19"	450	1	620x470x416	12.100
	TSPK-DS -7U6045 TSPK-DS -9U6045 TSPK-DS -12U6045	9U 19" Wall Mount Single Section Cabinet	57062	600x450x510	9U	425	510	600	19"	450	1	620x470x530	13.800
C	TSPK-DS -12U6045	12U 19" Wall Mount Single Section Cabinet	57063	600x450x680	12U	566	680	600	19"	450	1	620x470x700	15.400
2	TSPK-DS -7U6060	7U 19" Wall Mount Single Section Cabinet	57064	600x600x396	7U	330	396	600	19"	600	1	620x620x416	11.100
	TSPK-DS -7U6060 TSPK-DS -9U6060 TSPK-DS -12U6060	9U 19" Wall Mount Single Section Cabinet	57065	600x600x510	9U	425	510	600	19"	600	1	620x620x530	12.500
Ċ	TSPK-DS -12U6060	12U 19" Wall Mount Single Section Cabinet	57066	600x600x680	12U	566	680	600	19"	600	1	620x620x700	14.600
	TSPK-DS -7U6065	7U 19" Wall Mount Single Section Cabinet	57067	600x650x396	7U	330	396	600	19"	650	1	620x680x416	11.100
2	アロス TSPK-DS -9U6065 アスターファイン	9U 19" Wall Mount Single Section Cabinet	57068	600x650x510	9U	425	510	600	19"	650	1	620x680x530	12.500
0	TSPK-DS -12U6065 TSPK-DS -16U6065 TSPK-DS -16U6065	12U 19" Wall Mount Single Section Cabinet	57069	600x650x680	12U	566	680	600	19"	650	1	620x680x700	14.600
Č	TSPK-DS -16U6O65	16U 19" Wall Mount Single Section Cabinet	57070	600x650x790	16U	688	790	600	19"	650	1	620x680x810	12.500
	TSPK-DS -20U6065	20U 19" Wall Mount Single Section Cabinet	57071	600x650x1020	20U	921	1020	600	19"	650	1	620x680x1220	14.600









WALL MOUNTED ENCLOSURES

INDOOR - OUTDOOR

Easy to install,

Network distribution panels designed to create an efficient cost index.

Parallel to the high performance and quality of network applications,
it offers an unobtrusive price index thanks to fully automated industrial infrastructure and design.

The product group has the most efficient price index modeled on the required performance and qual



it has low shipping costs and low storage costs.

Each Panel is available as a standard metal front door with lockable 'O' lock with cylindrical single point locking.

DOUBLE INSULATION **ENCLOSURES IP 65**OUTDOOR

Pole Type Electrical / Automation / Industrial Panels:

Wall type Industrial / Automation / Electric panels, electrical distribution, automation and control control purposes It is used in internal and external environments. It can be connected to wall, pole and floor. 19 "with accessories can be used in applications.

GENERAL FEATURES

- Metal material is boiled for high strength.
 body is created.
- Full compliance with edge bends and lid seal.
- Narrow side bends provide more room for internal installation.
- IP65 Provides protection against dust and water.
- Mechanical resistance against external impact is high.
- Suitable for 500 hour salt test strength, Phosphate coating and RAL 7035 is painted 70-90 micron thick paint.
- Provides high strength against chemicals.
- For high strength, cover with multiple folded bends t was consolidated.
- There is only one lock on the cover, the cover can be made suitable for opening in the reverse direction.
- Highly corrosion resistant
- There is a sealing ring on the cover.
- Cable entry on the lower side depending on the size of the panel It is available.



Standard Production

Measures Used:

Height (mm): 600 / 700 / 800 Width (mm): 500 / 600 / 800 Depth (mm): 150 / 200 / 250

DOUBLE INSULATION **ENCLOSURES IP 65**OUTDOOR

DETAIL


- The main body is formed as a result of welding the lower upper part with the baffied center piece. Provides extra strength against multi-jawed body and welding load handling and external impact.
 - The lid structure is reinforced by strength and flatness with multiple bends and folds. It provides better contact with the gasket for better sealing protection.
- Base plate (Mounting plate) manufactured from galvanized sheet. From panels with height of 500 mm, cabling and it is manufactured by bending 4 sides (to 500 mm included) to assure the installation of the equipment.
 Wall mount brackets provide high-volume load handling without deformation.



DOUBLE INSULATION **ENCLOSURES IP 65**

OUTDOOR

TECHNICAL DETAILS

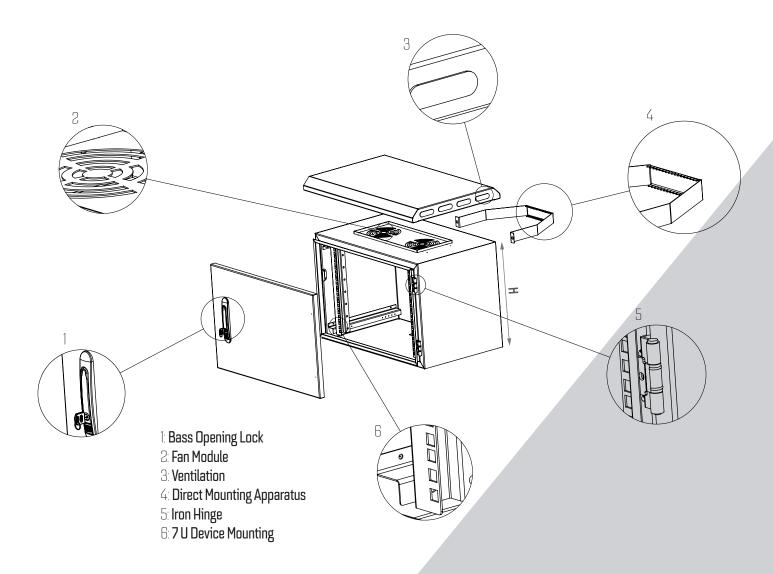

	Product Code	Description	Stock Code	Dimension wxdxh Mm	h Dimension in U	H mm Outside Outside	Widemm	Amount In Packing	Depth mm	Amount In Packing	Packing Dimension WxDxH mm	Net Product Weight G.	Gras Product Weight G.	
TP	-7U6440	7U OUTDOOR ENCLOSURES	17091	640x400x420	7U	420	640	19"	400	1	660x420x420	23.300	24.300	
TP	-9U6440	9U OUTDOOR ENCLOSURES	17092	640x400x555	9U	555	640	19"	400	1	660x420x555	29.900	30.900	
TP	-12U6440	12U OUTDOOR ENCLOSURES	17093	640x400x688	12U	688	640	19"	400	1	660x420x688	39.600	40.600	
TP	-16U6440	16U OUTDOOR ENCLOSURES	17094	640x400x821	16U	821	640	19"	400	1	660x420x821	52.800	53.800	

WALL MOUNTED **ENCLOSURES**IP 55 500 mm OUTDOOR

Improved IP55 Outdoor exterior panel

Steel construction, specially designed panel structure is resistant to bending and has a built-in screw system construction

. Protect your devices against external influences with high corrosion resistance.



GENERAL FEATURES

External Dimensions: The size and design of the external type panel CINA. Four of the bases at the bottom of the board it is fixed to the hole in the corner. Fixing operation If desired, the template is used.

Doors: 120o openable doors are locked from two spots. Depending on the design of the doors, knows.

Paint and surface treatment processes: Iron surface treatment process and then painted with RAL 7035 paint. In the standard, the inner parts are made entirely of galvanized sheet is. It is produced as aluminum on demand. Electrostatic powder coating is applied.

Protection class: IP55 – water and dust tightness. Cable entry: otherwise if not requested, on the bottom of the board. Cooling unit: can be added. Cable entry is standard if not specified.

Basic materials and standards: Main carrier profiles, spools, panels and panel ceiling Dkp are produced from the material.

Grounding: Hinges on the underside of the inside of each door for close grounding M6 nut is attached to the spot without paint-Taste.

Hinges: Iron hinges with anti-vandal features, fixed in the channel in the profile of the cap it forms an extension of the door. A possible challenge from the outside It is resistant to intervention.

Standard Production

Measures Used:

Height (mm): 600 Width (mm): 400 Depth (mm): 250

WALL MOUNTED **ENCLOSURES IP 55 500 mm**OUTDOOR


DETAIL

Made of 40x40 razor stainless sheet, W 150-200 mm, width and depth according to panel size It varies. The type of material and the type of material used can vary according to the project request. Template (Optional): Proper and easy installation of the panel to be used as a guide on concrete floor . The panel can be fixed to the concrete with four corner M12 tijings.



WALL MOUNTED **ENCLOSURES**IP 55 500 mm OUTDOOR

TECHNICAL DETAILS

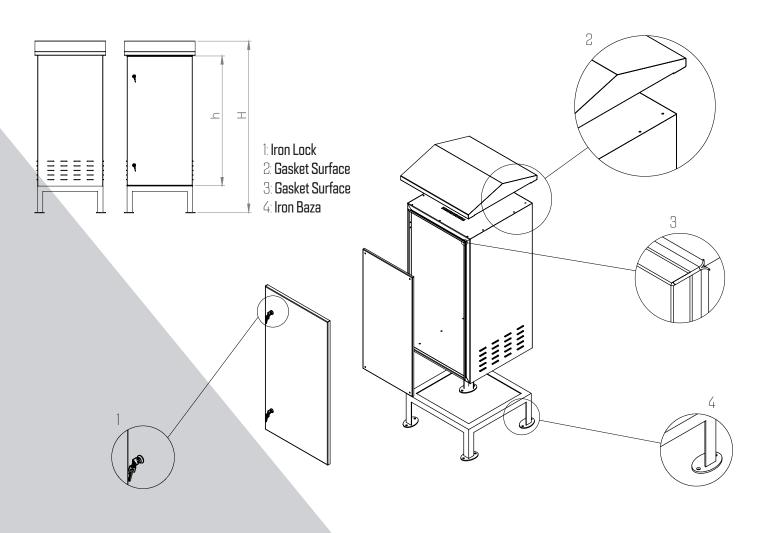

Product Code	Description	Stack Cade	Dımensıon wxdxh Mm	Depth	H mm Outside Outside	Widemm	Amount In Packing	Packing Dimension WxDxH mm	Net Product Weight G.	Gras Product Weight G.
TP-500x600	500x600 OUTDOOR ENCLOSURES	17081	500x600	150x200x250	600	500	1	520x620x170	24.000	25.000
TP-500x700	500x700 OUTDOOR ENCLOSURES	17082	500x700	150x200x250	700	500	1	520x720x170	28.000	29.000
TP-500x800	500x800 OUTDOOR ENCLOSURES	17083	500x800	150x200x250	800	500	1	520x820x170	32.000	33.000
TP-500x900	500x900 OUTDOOR ENCLOSURES	17084	500x900	150x200x250	900	500	1	520x920x170	36.000	37.000

WALL MOUNTED **ENCLOSURES DVR BOX**INDOOR

Wall Type CCTV / DVR / Enclosure:

Wall mount DVR BOX includes 1U 19" PDU assembly point, adjustable DVR mounting plates and standart monitor mounting point

GENERAL FEATURES





Colour Options





Standard Production

Measures Used:

Height (mm): 600 / 700 / 800 Width (mm): 500 / 600 / 800 Depth (mm): 150 / 200 / 250 • Can be produced in desired sizes

WALL MOUNTED **ENCLOSURES DVR BOX**INDOOR

DETAIL

- The main body is formed as a result of welding the lower upper part with the baffied center piece. Provides extra strength against multi-jawed body and welding load handling and external impact.
 - The lid structure is reinforced by strength and flatness with multiple bends and folds. It provides better contact with the gasket for better sealing protection.
- Base plate (Mounting plate) manufactured from galvanized sheet. From panels with height of 500 mm, cabling and it is manufactured by bending 4 sides (to 500 mm included) to assure the installation of the equipment.
 - Wall mount brackets provide high-volume load handling without deformation.



Wall Type Electrical / Automation / Industrial Panels:

Wall type Industrial / Automation / Electrical panels are used for internal and external environments for electrical distribution, automation and control purposes.

Wall mount or pole mount can be used. It can be used with 19 "applications with accessories.

GENERAL FEATURES

- Metal material is boiled for high strength body is created.
- Narrow side bends provide more room for internal installation.
- The base sheet can be easily taken into or out of the panel.
- Suitable for 500 hour salt test strength, Nano-Zirconium
 based Henkel Bonderite Nanotechnology coating with RAL
 7035 Ince rough color, 70-90 micron thick.
- Provides high strength against chemicals.
- For high strength, cover with multiple folded bends It was consolidated.
- There is a single or double lock on the cover,
 the lid can be adapted for opening in the opposite direction.
- Gasket is applied on the cover for sealing.
- Cable entry on the lower side depending on the size of the panel It is available.







RAL 9005 RAL 7035 Black Light Grey



Standard Production

Measures Used:

Height (mm): 600 / 700 / 800 Width (mm): 500 / 600 / 800 Depth (mm): 150 / 200 / 250 • Can be produced in desired sizes

DETAILS

- The main body, bottom top part, bucumin boiling is created as a result.

 Provides extra strength against multi-jawed body and welding load handling and external impact.
 - The lid structure is reinforced by strength and flatness with multiple bends and folds.
 - Base plate (Mounting plate) manufactured from galvanized sheet (including 500 mm)
 - Wall mount brackets provide high-volume load handling without deformation.



Wall Type Electrical / Automation / Industrial Panels:

Wall type Industrial / Automation / Electrical panels are used for internal and external environments for electrical distribution, automation and control purposes.

Wall mount or pole mount can be used. It can be used with 19 "applications with accessories.

GENERAL FEATURES

- Metal material is boiled for high strength body is created.
- Narrow side bends provide more room for internal installation.
- The base sheet can be easily taken into or out of the panel.
- Suitable for 500 hour salt test strength, Nano-Zirconium
 based Henkel Bonderite Nanotechnology coating with RAL
 7035 Ince rough color, 70–90 micron thick.
- Provides high strength against chemicals.
- For high strength, cover with multiple folded bends It was consolidated.
- There is a single or double lock on the cover, the lid can be adapted for opening in the opposite direction.
- Gasket is applied on the cover for sealing.
- Cable entry on the lower side depending on the size of the panel It is available.



Standard Production

Measures Used:

Height (mm): 600 / 700 / 800 Width (mm): 500 / 600 / 800 Depth (mm): 150 / 200 / 250 • Can be produced in desired sizes

DETAILS

- The main body, bottom top part, bucumin boiling is created as a result.

 Provides extra strength against multi-jawed body and welding load handling and external impact.
 - The lid structure is reinforced by strength and flatness with multiple bends and folds.
 - Base plate (Mounting plate) manufactured from galvanized sheet (including 500 mm)
 - Wall mount brackets provide high-volume load handling without deformation.




WALL MOUNTED **ENCLOSURES**

500x600

INDOOR

TECHNICAL DETAILS

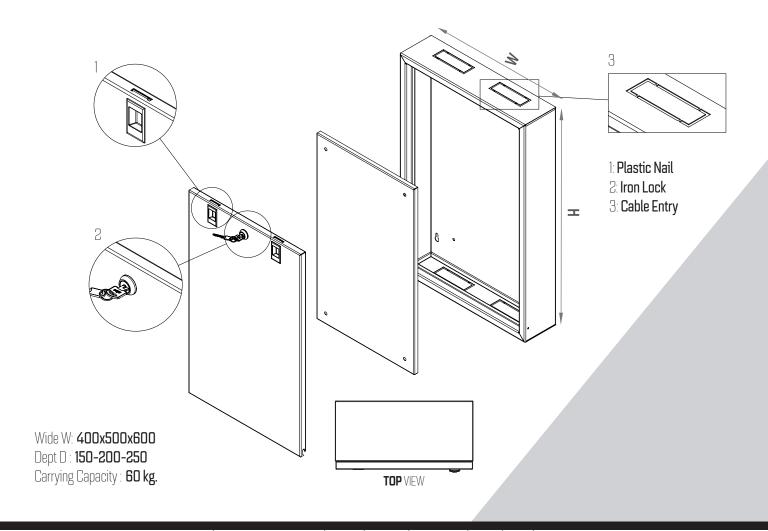

Product Code	Description	Stock Code	Dimension wxdxh Mm	Depth	H mm Outside Outside	Widemm	Net 1	Product Wi	eight G. 250
TP-400x300	400x300 INDOOR ENCLOSURES	17061	400x300	150x200x250	300	400	4.500	6.000	7.500
TP-400x600	400x600 INDOOR ENCLOSURES	17062	400x600	150x200x250	600	400	9.000	12.000	15.000
TP-400x700	400x700 INDOOR ENCLOSURES	17063	400x700	150x200x250	700	400	10.500	14.000	17.500
TP-400x1100	400x1100 INDOOR ENCLOSURES	17064	400x1100	150x200x250	1100	400	16.500	22.000	27.700
TP-500x600	500x600 INDOOR ENCLOSURES	17065	500x600	150x200x250	600	500	9.800	13.000	16.300
TP-500x700	500x700 INDOOR ENCLOSURES	17066	500x700	150x200x250	700	500	10.000	13.200	16.500
TP-600x700	600x700 INDOOR ENCLOSURES	17067	600x700	150x200x250	700	600	12.000	16.000	20.000
TP-600x800	600x800 INDOOR ENCLOSURES	17068	600x800	150x200x250	800	600	13.700	18.200	22.800
TP-600x900	600x900 INDOOR ENCLOSURES	17069	600x900	150x200x250	900	600	15.400	20.500	25.500
TP-750x1200	750x1200 INDOOR ENCLOSURES	17070	50x1200	150x200x250	1200	750	20.500	27.300	34.200
TP-800x1200	800x1200 INDOOR ENCLOSURES	17071	800x1200	150x200x250	1200	800	19.000	25.450	31.800



With professional rail system and cable management

provides practical fiber termination to the user.

1U 19" rack mounting, sliding-slide type, with mounting bracket, depth adjustment, metal clip - screw locking, splice is bolted to the center for cassette connection.

Fiber optic is available for termination and seperation.

SC and FC options are available.

SPECIFICATIONS

12 DX SC PORT: 24 Fiber Termination Capacity

Width: 465mm

Height: (1U)

Depth: 238mm

Sheet thickness: 1,2 mm

SC, FC, ST, E2000, LC, MU etc. All known connectors such as types are possible.







PRODUCT CODE	STOCK CODE	MODEL
TPP 12 SC	11159	Patch Panel 19 inc Rack Type 1 U Metal Case 12 Port Output
TPP 24 SC	11160	Patch Panel 19 inc Rack Type 1 U Metal Case 24 Port Output
TPP 48 SC	11161	Patch Panel 19 inc Rack Type 2 U Metal Case 48 Port Output
TPP 72 SC	11162	Patch Panel 19 inc Rack Type 3 U Metal Case 72 Port Output
TPP 96 SC	11163	Patch Panel 19 inc Rack Type 4 U Metal Case 96 Port Output







With professional rail system and cable management

provides practical fiber termination to the user.

1U 19" rack mounting, sliding-slide type, with mounting bracket, depth adjustment, metal clip - screw locking, splice is bolted to the center for cassette connection.

Fiber optic is available for termination and seperation.

SC and FC options are available.

SPECIFICATIONS

12 DX SC PORT: 24 Fiber Termination Capacity

Width: 465mm

Height: (1U)

Depth: 238mm

Sheet thickness: 1.2 mm

SC, FC, ST, E2000, LC, MU etc. All known connectors such as types are possible.







PRODUCT CODE	STOCK CODE	MODEL
TPP 12 FC	11165	Patch Panel 19 inc Rack Type 1 U Metal Case 12 Port Output
TPP 24 FC	11166	Patch Panel 19 inc Rack Type 1 U Metal Case 24 Port Output
TPP 48 FC	11167	Patch Panel 19 inc Rack Type 2 U Metal Case 48 Port Output
TPP 72 FC	11168	Patch Panel 19 inc Rack Type 3 U Metal Case 72 Port Output









PATCH PANEL Wall Type Fixed SC/APC TERMINATION

With professional rail system and cable management

provides practical fiber termination to the user.

1U 19" rack mounting, sliding-slide type, with mounting bracket, depth adjustment, metal clip - screw locking, splice is bolted to the center for cassette connection.

Fiber optic is available for termination and seperation.

SC and FC options are available.

SPECIFICATIONS

12 DX SC PORT: 24 Fiber Termination Capacity

Width: 465mm

Yükseklik: [1U]

Height: 238mm

Sheet thickness: 1,2 mm

SC, FC, ST, E2000, LC, MU etc. All known connectors such as types are possible.







PRODUCT CODE	STOCK CODE	MODEL
TPP 12 SC	11159	Patch Panel 19 inc Rack Type 1 U Metal Case 12 Port Output
TPP 24 SC	11160	Patch Panel 19 inc Rack Type 1 U Metal Case 24 Port Output
TPP 48 SC	11161	Patch Panel 19 inc Rack Type 2 U Metal Case 48 Port Output
TPP 72 SC	11162	Patch Panel 19 inc Rack Type 3 U Metal Case 72 Port Output
TPP 96 SC	11163	Patch Panel 19 inc Rack Type 4 U Metal Case 96 Port Output







With professional rail system and cable management

provides practical fiber termination to the user.

1U 19" rack mounting, sliding-slide type, with mounting bracket, depth adjustment, metal clip - screw locking, splice is bolted to the center for cassette connection.

Fiber optic is available for termination and seperation.

SC and FC options are available.

SPECIFICATIONS

12 DX SC PORT: 24 Fiber Termination Capacity

Width: 465mm

Height: (1U)

Depth: 238mm

Sheet thickness: 1.2 mm

SC, FC, ST, E2000, LC, MU etc. All known connectors such as types are possible.







PRODUCT CODE	STOCK CODE	MODEL
TPP 12 FC	11165	Patch Panel 19 inc Rack Type 1 U Metal Case 12 Port Output
TPP 24 FC	11166	Patch Panel 19 inc Rack Type 1 U Metal Case 24 Port Output
TPP 48 FC	11167	Patch Panel 19 inc Rack Type 2 U Metal Case 48 Port Output
TPP 72 FC	11168	Patch Panel 19 inc Rack Type 3 U Metal Case 72 Port Output











Used for fiber optic termination:

ST, SC, LC options are available.

- · Lockable front door with spring screws.
- Supplied with cable gland (1 pc.) And plastic cable gland PG16 (1 pcs).
- Clips in the cable are available for cable connection forms are required.
- Can be shipped as RAL 7035 (OPEN GRAY) and RAL 9005 (BLACK).

S TYPE FIBER BOX





SPECIFICATIONS

- Provides a robust, two-chamber metal structure suitable for wall mounting.
- With its lockable front cover, it partially prevents the irrelevant people from accessing.
- Easy to install.
- With 6 PG16 records, it is provided to fix the input cable and is suitable for intensive cable entry.
- Mounting holes are available for cassette connection.







SM TYPE FIBER BOX

SPECIFICATIONS





- Provides a robust, two-chamber metal structure suitable for wall mounting.
- With its lockable front cover, it partially prevents the irrelevant people from accessing.
- Easy to install.
- With 6 PG16 records, it is provided to fix the input cable and is suitable for intensive cable entry.
- Mounting holes are available for cassette connection.

M TYPE FIBER BOX





SPECIFICATIONS

- Provides a robust, two-chamber metal structure suitable for wall mounting.
- With its lockable front cover, it partially prevents the irrelevant people from accessing.
- Easy to install.
- With 6 PG16 records, it is provided to fix the input cable and is suitable for intensive cable entry.
- Mounting holes are available for cassette connection.










FIBER OPTIC Wall Type TERMINATION BOX

B TYPE FIBER BOX

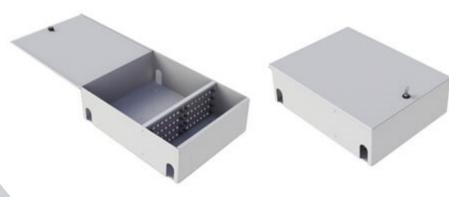

SPECIFICATIONS

- Suitable for wall mounting

Lockable front cover

• Easy montage

• Modular internal panel structure

• 4-point cable entry

• Port for fiber cassette

D TYPE FIBER BOX





SPECIFICATIONS

- Suitable for wall mounting
- Lockable front cover
- Easy montage
- Modular internal panel structure
- 4-point cable entry
- Port for fiber cassette









FIBER OPTIC Wall Type TERMINATION BOX

Used for fiber optic termination:

ST, SC, LC options are available.

- · Lockable front door with spring screws.
- Supplied with cable gland (1 pc.) And plastic cable gland PG16 (1 pcs).
- Clips in the cable are available for cable connection forms are required.
- Can be shipped as RAL 7035 (OPEN GRAY) and RAL 9005 (BLACK).

PRODUCT CODE	STOCK CODE	MODEL
TPS 01	11129	Optical Termination Box 1 Port Output Plastic Case, Wall Type
TPS 04	11130	Optical Termination Box 4 Port Output Plastic Case, Wall Type
TPS 12	11131	Optical Termination Box 12 Port Output Plastic Case, Wall Type
TPS 24	11132	Optical Termination Box 24 Port Output Plastic Case, Wall Type

TPS 12



TECHNICAL SPECIFICATIONS

Teknoline TPS 12 - Finite Wall Type 12 Port Output Metal Case

Wall Type

TPS 04



Teknoline TPS 04 - Finite Wall Type 12 Port Output Metal Case

Wall Type











ACCESSORIES





GENERAL FEATURES

Horizontal Cable Regulation Class,

The cabinets are various accessories for the management of the cables, management and transfer. 1U, 2U brushes, with hooks available. Available in RAL 9005 Black and RAL 7035 Light Gray Colors.

Stock Code : 17101	W:600 x D:600	W:600 x D:600	W:600 x D:150 entegre With additional compartments D: 450 + 150 or D: 600+150				
Horizontal Cable Arrangement Panel 19" 1U 5 with hook	TYO-2U5K	TYO-2U5K					
**CC· Available in RAL 9005 Black and RAL 7035 Light Gray Colors, color can be made according to customer request							





GENERAL FEATURES

In the Vertical Cable Regulation Class,

Cabinets are cable ducts for management and transmission purposes. Cables are arranged on the slots, hyphenated it is transferred to the relevant equipment properly and manageably. By side-by-side mounting, the cable can be moved Cable ducts reinforced with 2 bends from metal are offered in zinc plated (8-12 micron).

Stock Code : 17102	W:600 x D:600	W:600 x D:600	W:600 x D:150 entegre With additional compartments D: 450 + 150 or D: 600+150			
Vertical Cable Arrangement Panel 19" 1U 5 with hook	TYO-1U5K	TYD-2U5K	TYO-2U5K			
**CO A. wilele is DAL DOOF District DAL TOOF Light Con. Colons and a second section of the contract of the con						

 * CC \cdot Available in RAL 9005 Black and RAL 7035 Light Gray Colors, color can be made according to customer request





GENERAL FEATURES

Fixed Shelf 4 point connected,

They are compatible with stand-up type rack cabinets. Ventilation slots are placed in order not to interfere with the ventilation system. It has been reported. It is a high-strength accessory constructed from steel material with bending technology. Carrying capacity 40 kg

	_ , , ,						
	Stock Code: 17103 Stock Code: 17104 Stock Code: 17105	W:400 x D:425 W:475 x D:695 W:475 x D:800	W:400 x D:425 W:475 x D:695 W:475 x D:800	W:600 x D:150 entegre With additional compartments D: 450 + 150 or D: 600+150			
	Fixed Shelf	TRK-SRB6060	TRK-SRB6060	TRK-SRB6060			
**CC_Available in DAL 2005 Plank and DAL 2005 Light Cray Colors only can be made according to questioner required							











SHELF MOVABLE



GENERAL FEATURES

Movable Shelves 4 point connected,

All brands are cabinet compatible products. The deeply movable device is integrated with the stand mounting ears.

Ventilation slots are provided to prevent any obstruction to the ventilation system.

Stock Code: 17106 Stock Code: 17107 Stock Code: 17108	W:400 x D:425 W:475 x D:695 W:475 x D:800	W:400 x D:425 W:475 x D:695 W:475 x D:800	W:600 x D:150 entegre With additional compartments D: 450 + 150 or D: 600+150
Movable Shelves	TRK-HR6060	TRK-SRB6060	TRK-SRB6060

^{**}CC · Available in RAL 9005 Black and RAL 7035 Light Gray Colors, color can be made according to customer request





FAN **MODULE**WITH 2 and 4

GENERAL FEATURES

Wall type, Stylish type, Server type cabinet special,

They are Fan Module units that can be used at their height.

Ready integrated on / off lu units with plug-and-play operation. Beher Fan capacity is 2,3-3 m3 / min air flow.

With 2 Stock Code: 17109 With 4 Stock Code: 17110	W:600 x D:450	W:600 x D:600	W:600 x D:150 entegre With additional compartments D: 450 + 150 or D: 600+150	
With 1 Fan Unit on/off switch	LN-FAN-ONF-1FWM-CC	LN-FAN-ONF-1FWM-CC	LN-FAN-ONF-1FWM-CC	
With 1 Fan Unit Thermostat Remote	LN-FAN-THM-1FWM-CC	LN-FAN-THM-1FWM-CC	LN-FAN-THM-1FWM-CC	
With 2 Fan Unit on/off switch	LN-FAN-ONF-2FWM-CC	LN-FAN-ONF-2FWM-CC	LN-FAN-ONF-2FWM-CC	
With 2 Fan Unit Thermostat Remote	LN-FAN-THM-2FWM-CC	LN-FAN-THM-2FWM-CC	LN-FAN-THM-2FWM-CC	

**CC · Available in RAL 9005 Black and RAL 7035 Light Gray Colors, color can be made according to customer request

GROUP SOCKET With 6 and 9



GENERAL FEATURES

Aluminum Body, different features and types,

Energy Distribution Modules. CE Certified. DIN49440 Schuko, IEC 320 C13 IEC type, BS1363 UK Plug-in types, illuminated 16A on / off, 16A Fuse Protection, Overvoltage Protection, and many other types and features.

Stock Code: 17111	W:600 x D:450	W:600 x D:600	W:600 x D:150 entegre With additional compartments D: 450 + 150 or D: 600+150
With socket 6 Schuko tip, 16A insurance	LN-PRZ-SGT-1U6P-SC	LN-PRZ-SGT-1U6P-SC	LN-PRZ-SGT-1U6P-SC







RACK **CABINET** WHEEL

GENERAL FEATURES

Specially designed for cabinet ...

Height-adjustable PVC Foot System and 360-degree fully-movable wheel groups on the y-axis. Each set consists of 4 pieces, wheels There are 2 brakes, 2 brakes. It is an accessory designed for connecting the cabinets to the floor.

	Stock Code: 17112	W:600 x D:450	W:600 x D:600	W:600 x D:150 entegre With additional compartments D: 450 + 150 or D: 600+150
	With whell groups 2 brakes, 2 brakless	LN-ZMN-TKR-5020-XX	LN-ZMN-TKR-5020-XX	LN-ZMN-TKR-5020-XX





GENERAL FEATURES

It is used in electric panels and machine covers.

Stock Code: 17113

Raw Materials	Technical Features	Cylinder	Material	O'ring
POLYAMIDE PA6 GFR30	BODY:POLYAMIDE PA6 GFR30	ZINC DIN-EN 1774 ZnAI4Cu1	STEEL	RUBBER



RACK CABINET THERMOSTAT

GENERAL FEATURES

Thanks to the practical and ergonomic construction,

all kinds of brand and model active and passive devices can be installed in any detail accessories are manufactured in consideration of active and passive ventilation and traceability.

DEMPERATURE SENSOR DIGITAL HEAT INDICATOR WITH SYSTEM COOLING FAN TEMPERATURE DETERMITIC	EMPERATURE SENSOR	JIGITAL HEAT INDICATOR WITH SYSTE	EM COOLING FAN TEMPERATURE DETERMITI
------------------------------------------------------------------------------------------	-------------------	-----------------------------------	--------------------------------------

Stock Code: 17114

The digital temperature sensor measures the temperature of the heat and Fan I and 2 enter the circuit at the specified temperature intervals.

At extremely high temperatures the Buzzer Alarm is switched on and the warning buzzer sounds.













GENERAL FEATURES

Stock Code: 17115	W:600 x D:450	W:600 x D:600	W:600 x D:150 entegre With additional compartments D: 450 + 150 or D: 600+150
BRUSH	-	***LN-RAF-HRK-D600-CC	***LN-RAF-HRK-D600-CC

**CC · Available in RAL 9005 Black and RAL 7035 Light Gray Colors, color can be made according to customer request



RACK CABINET COVERING PANEL

GENERAL FEATURES

Network and Storage applications,

in order to correct the appearance by turning off the meter, which is not fitted with the device,

It is used as a stopper and a router in the passages.

19 "Closed Panels with Closed Type Tooling Units from 1U to 6U, Hand-held with special type rotatable clips mounting.

Covering panels with 2 bendings made of metal are supplied in RAL 9005 Black and RAL 7035 Light Gray Colors.

1U and 2U models are available with Slotted Ventilation

Stock Code: 17116

RACK CABINET BOLT



GENERAL FEATURES

M6 Steel Cage Nut Set,

20 and 50 packages including screws and washers, connection elements such as cabinet connection kit

Stock Code 17117







OUR DOCUMENTS

ISO 9001



ISO 14001



OHSAS 18001



CAPACITY REPORT



RACK CABIN EC DECLARATION



RACK CABIN RoHS DECLARATION



TEKNIKSATELECTRICITY INSPECTION AND TEST REPORT



TEKNIKSATMETAL SERVICE CERTIFICATE





Koza Mahallesi 1678 Sokak No:29 Esenyurt/İSTANBUL - TURKEY

> Tel.: +90 212 620 41 11 Fax: +90 212 620 43 33 info@tekniksatcabinet.com

www.tekniksatcabinet.com